



Button Hanger Installation Instructions

Install the button hanger with the button on the driver side of the board.

Place the cable loop on the button shaft, insert the button with cable attached from the driver side of the board and place the screw in the receiving hole of the button from the opposite side of the board. Turn the button until finger tight. Finish the tightening by using a #2 Phillips screwdriver in the screw attachment until secure. Check the button and cable to make sure all is tight and correctly installed. Repeat for each of the 4 hanging locations. After installing the four button hangers, gather both hanger cables and insert in a ratchet strap carabiner. Ensure the carabiner is closed completely.


If you need tech support, please feel free to call 877-445-4533 Ext 5.




Button shown on driver side of plate



Install button hanger with #2 Phillips screwdriver as shown

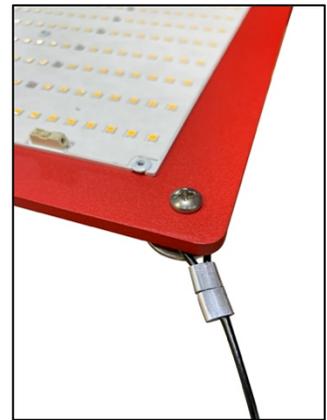

View from lamp side of light

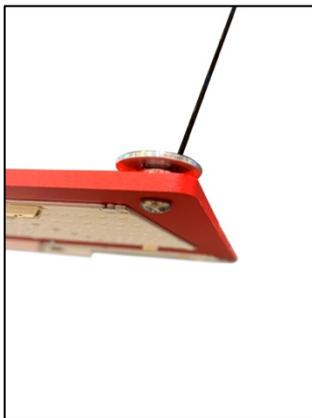

View from underside of light



Full view example of proper installation and hanging



Gather both hanger cables and insert in the ratchet strap carabiner. Ensure the carabiner is closed completely

HLG 600 R Spec shown above as an example. Your light may vary on the button connection points.